




Achray Photonics  
19 Nottingham Crt. Ottawa, ON, K2J 4P4 Canada  
Tel: (613) 823-2211  
Fax: (613) 823-1322  
www.achray.com

## Laser Module 785nm

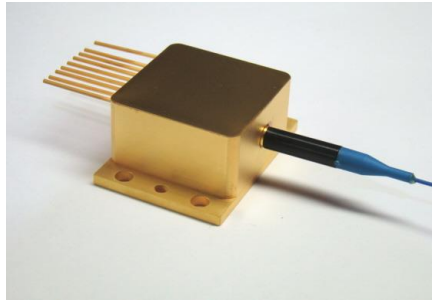

Achray Photonics is pleased to offer fiber coupled Laser Modules at 785nm. The modules are offered in two basic versions of optical output: fiber coupled and free-space collimated beam. Each module is equipped with a Thermo Electric Cooler and a temperature sensor for thermal stability. All optical components are AR coated to ensure low back reflection and low optical noise. Fiber coupled laser modules feature high coupling efficiency ranging from 70% to 90%. On request, customized designs are available: dual wavelength, filters, FBG wavelength stabilization, high-speed output light modulation etc.

785nm Laser module specifications and options are listed below:

- |                       |   |
|-----------------------|---|
| 1. Optical power:     | 350mW                                   |
| 2. Wavelength;        | 775/785/795nm (Min, Typical, Max)       |
| 3. Fiber:             | 50/125 MM fiber. Other fibers available |
| 4. Optical Connector: | FC/UPC (standard)                       |
| 5. Max Current:       | 600 mA                                  |
| 6. Nominal Current:   | 550 mA                                  |
| 7. Threshold Current: | 110 mA                                  |
| 8. Nominal Voltage:   | 2V                                      |
| 9. Max Voltage:       | 2.6V                                    |
| 10. PD Current:       | 100uA (typical)                         |